

# EL3005: Señales y Sistemas I

## III. Procesamiento Digital de Señales: Transformada Z

Jorge Silva



## Propiedades de la Transformada Z Bilateral


TABLE 3.2 PROPERTIES OF THE Z-TRANSFORM

| Property                        | Time Domain                                                                                    | z-Domain                                                             | ROC                                                                    |
|---------------------------------|------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|------------------------------------------------------------------------|
| Notation                        | $x(n)$<br>$x_1(n)$<br>$x_2(n)$                                                                 | $X(z)$<br>$X_1(z)$<br>$X_2(z)$                                       | ROC: $r_2 <  z  < r_1$<br>ROC <sub>1</sub><br>ROC <sub>2</sub>         |
| Linearity                       | $a_1 x_1(n) + a_2 x_2(n)$                                                                      | $a_1 X_1(z) + a_2 X_2(z)$                                            | At least the intersection of ROC <sub>1</sub> and ROC <sub>2</sub>     |
| Time shifting                   | $x(n - k)$                                                                                     | $z^{-k} X(z)$                                                        | That of $X(z)$ , except $z = 0$ if $k > 0$ and $z = \infty$ if $k < 0$ |
| Scaling in the z-domain         | $a^n x(n)$                                                                                     | $X(a^{-1}z)$                                                         | $ a r_2 <  z  <  a r_1$                                                |
| Time reversal                   | $x(-n)$                                                                                        | $X(z^{-1})$                                                          | $\frac{1}{r_1} <  z  < \frac{1}{r_2}$                                  |
| Conjugation                     | $x^*(n)$                                                                                       | $X^*(z^*)$                                                           | ROC                                                                    |
| Real part                       | $\text{Re}\{x(n)\}$                                                                            | $\frac{1}{2}[X(z) + X^*(z^*)]$                                       | Includes ROC                                                           |
| Imaginary part                  | $\text{Im}\{x(n)\}$                                                                            | $\frac{1}{2j}[X(z) - X^*(z^*)]$                                      | Includes ROC                                                           |
| Differentiation in the z-domain | $nx(n)$                                                                                        | $-z \frac{dX(z)}{dz}$                                                | $r_2 <  z  < r_1$                                                      |
| Convolution                     | $x_1(n) * x_2(n)$                                                                              | $X_1(z)X_2(z)$                                                       | At least, the intersection of ROC <sub>1</sub> and ROC <sub>2</sub>    |
| Correlation                     | $r_{x_1 x_2}(l) = x_1(l) * x_2(-l)$                                                            | $R_{x_1 x_2}(z) = X_1(z)X_2(z^{-1})$                                 | At least, the intersection of ROC of $X_1(z)$ and $X_2(z^{-1})$        |
| Initial value theorem           | If $x(n)$ causal                                                                               | $x(0) = \lim_{z \rightarrow \infty} X(z)$                            |                                                                        |
| Multiplication                  | $x_1(n)x_2(n)$                                                                                 | $\frac{1}{2\pi j} \oint_C X_1(v)X_2\left(\frac{z}{v}\right)v^{-1}dv$ | At least $r_{11}r_{21} <  z  < r_{1\infty}r_{2\infty}$                 |
| Parseval's relation             | $\sum_{-\infty}^{\infty} x_1(n)x_2^*(n) = \frac{1}{2\pi j} \oint_C X_1(v)X_2^*(1/v^*)v^{-1}dv$ |                                                                      |                                                                        |

## Tabla de Transformadas Canónicas


TABLE 3.3 SOME COMMON Z-TRANSFORM PAIRS

|    | Signal, $x(n)$               | $z$ -Transform, $X(z)$                                                      | ROC         |
|----|------------------------------|-----------------------------------------------------------------------------|-------------|
| 1  | $\delta(n)$                  | 1                                                                           | All $z$     |
| 2  | $u(n)$                       | $\frac{1}{1 - z^{-1}}$                                                      | $ z  > 1$   |
| 3  | $a^n u(n)$                   | $\frac{1}{1 - az^{-1}}$                                                     | $ z  >  a $ |
| 4  | $na^n u(n)$                  | $\frac{az^{-1}}{(1 - az^{-1})^2}$                                           | $ z  >  a $ |
| 5  | $-a^n u(-n - 1)$             | $\frac{1}{1 - az^{-1}}$                                                     | $ z  <  a $ |
| 6  | $-na^n u(-n - 1)$            | $\frac{az^{-1}}{(1 - az^{-1})^2}$                                           | $ z  <  a $ |
| 7  | $(\cos \omega_0 n) u(n)$     | $\frac{1 - z^{-1} \cos \omega_0}{1 - 2z^{-1} \cos \omega_0 + z^{-2}}$       | $ z  > 1$   |
| 8  | $(\sin \omega_0 n) u(n)$     | $\frac{z^{-1} \sin \omega_0}{1 - 2z^{-1} \cos \omega_0 + z^{-2}}$           | $ z  > 1$   |
| 9  | $(a^n \cos \omega_0 n) u(n)$ | $\frac{1 - az^{-1} \cos \omega_0}{1 - 2az^{-1} \cos \omega_0 + a^2 z^{-2}}$ | $ z  >  a $ |
| 10 | $(a^n \sin \omega_0 n) u(n)$ | $\frac{az^{-1} \sin \omega_0}{1 - 2az^{-1} \cos \omega_0 + a^2 z^{-2}}$     | $ z  >  a $ |

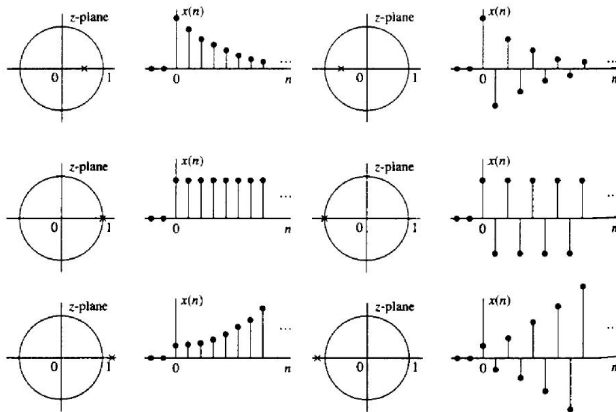Series de tiempo CAUSALES asociadas a  $X(Z) = \frac{1}{1-az^{-1}}$ 

**Figure 3.11** Time-domain behavior of a single-real pole causal signal as a function of the location of the pole with respect to the unit circle.

Series de Tiempo POLO doble:  $X(Z) = \frac{az^{-1}}{(1-az^{-1})^2}$

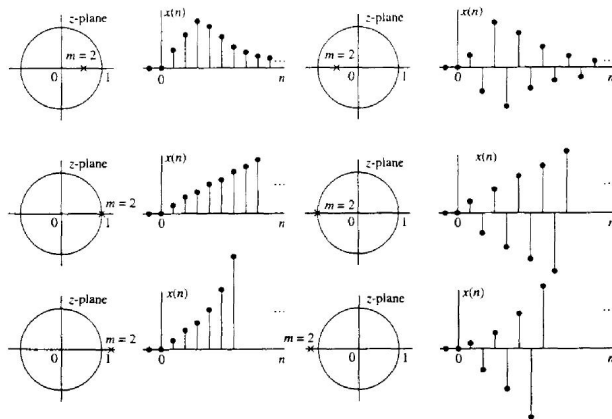

**Figure 3.12** Time-domain behavior of causal signals corresponding to a double ( $m = 2$ ) real pole, as a function of the pole location.

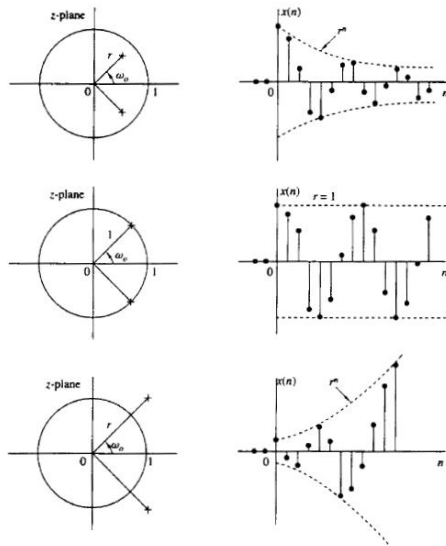
Series de Tiempo POLOS complejos conjugados:  $p_1, p_2 = r \cdot e^{\pm j\omega_0}$ 

Figure 3.13 A pair of complex-conjugate poles corresponds to causal signals with oscillatory behavior.