


Performance

Model	Maximum flow rate			Maximum head	
	l/min	cu.m/hr	gall/min	metres	feet
CM50	830	50	180	36	118

Maximum power absorbed 5kW at 2900rpm

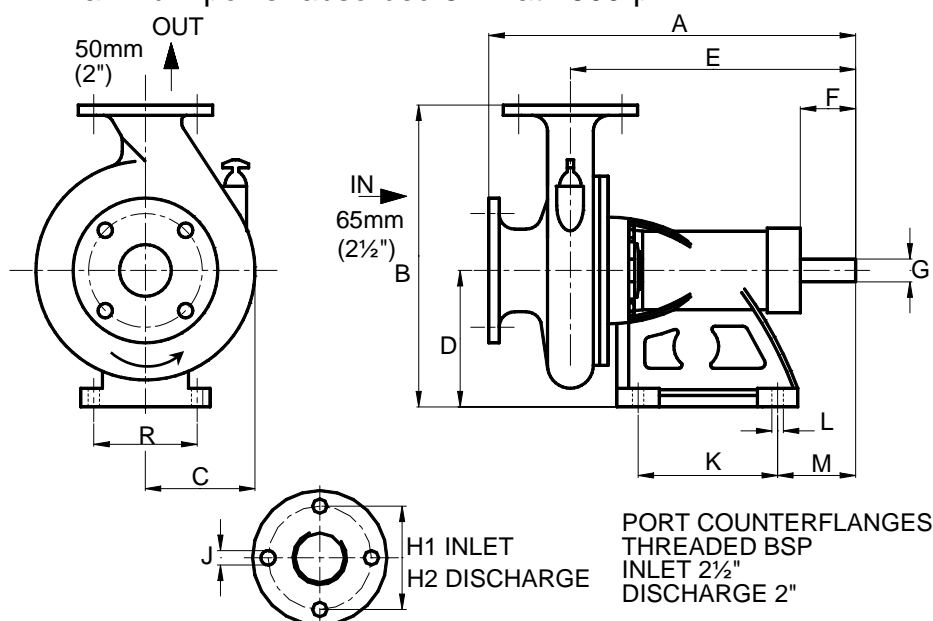

Dimensions in mm (approx.)

A	B	C	D	E	F	G	H1	H2	J	K	L	M	R
365	312	122	132	276	50	22 J6	130	110	14	135	13	73	100

Materials of construction

Pump casing	bronze
Impeller	bronze
Port counterflanges	bronze
Shaft	stainless steel AISI316
Bearing housing	cast iron
Pump head bolts	stainless steel
O-ring static seal	nitrile rubber

Pump performance and specification are subject to alteration without notice

FP-series CM50



2" BRONZE
NON-SELF-PRIMING
CENTRIFUGAL PUMP

- ♦ corrosion-resistant bronze body & impeller, with stainless steel shaft
- ♦ also available with opposite rotation
- ♦ carbon-ceramic mechanical shaft seal

**BRONZE
PUMPS**
for
SEAWATER

Cleghorn Waring & Co (Pumps) Ltd
Icknield Way Letchworth
Hertfordshire SG6 1EZ

Telephone: +44 (0)1462 480380

Fax: +44 (0)1462 482422 E-mail: mail@cleghorn.co.uk