




*Workbench - Mechanical Introduction 12.0*

## Workshop 2.1

# ANSYS Mechanical Basics


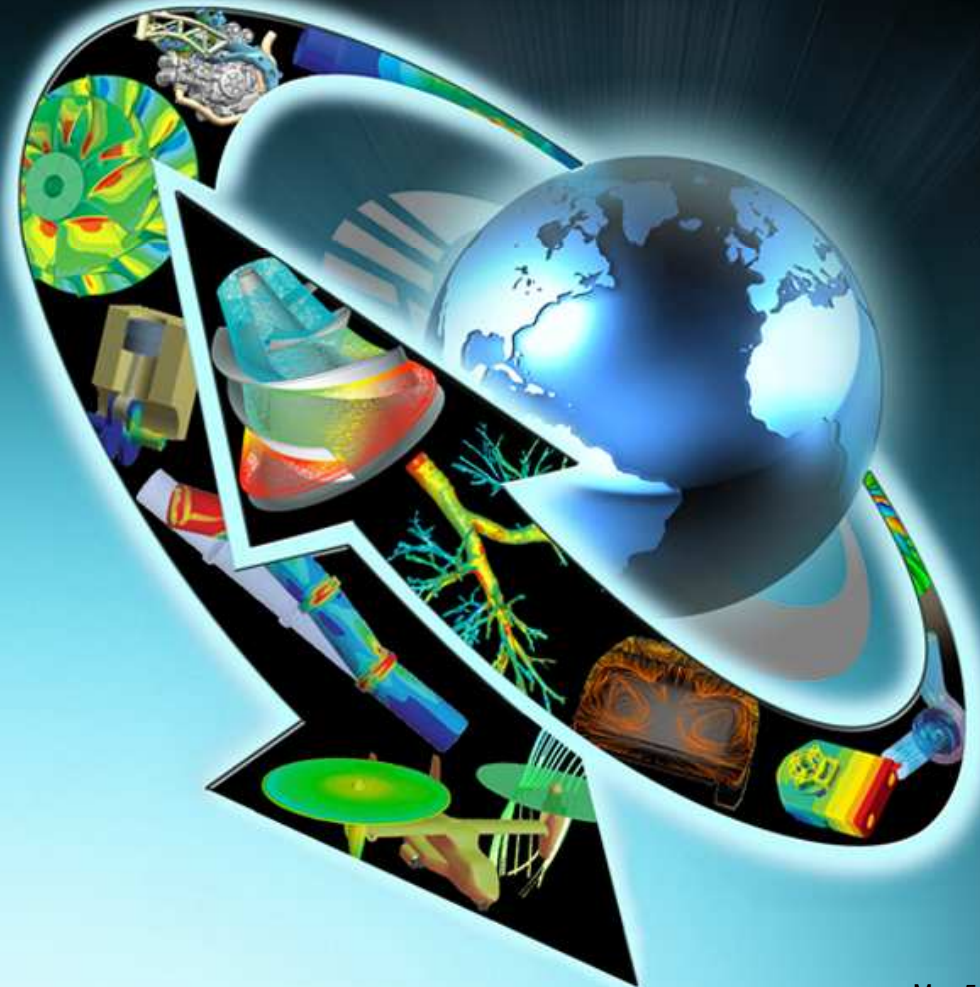


## Notes on Workshop 2.1

- **The first workshop is extensively documented. As this course progresses, students will become more familiar with basic Workbench Mechanical functionality (menu locations etc.), thus subsequent workshops will contain less details.**
- **Throughout these workshops menu paths are documented as: “First pick > Second pick > etc.”.**
- **Workshops begin with a goals section followed by an assumptions section.**



## Workshop 2.1 - Goals

- Using the Stress Wizard, set up and solve a structural model for stress, deflection and safety factor.
- Problem statement:
  - The model consists of a Parasolid file representing a control box cover (see figure). The cover is intended to be used in an external pressure application (1 Mpa/145 psi).
  - The cover is to be made from aluminum alloy.
  - Our goal is to verify that the part will function in its intended environment.

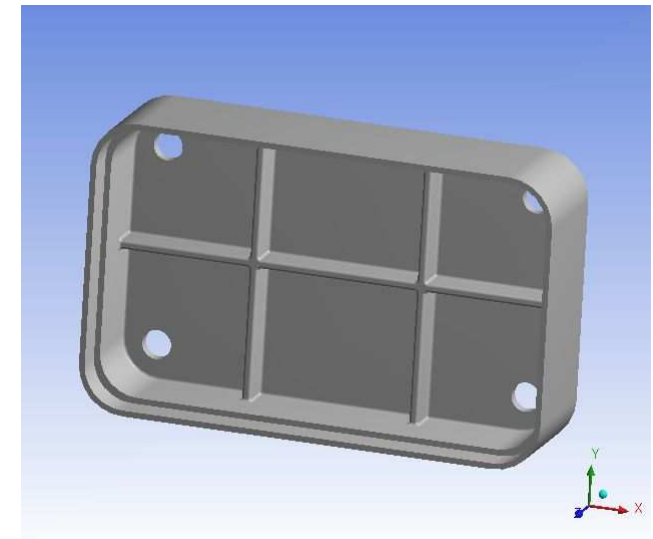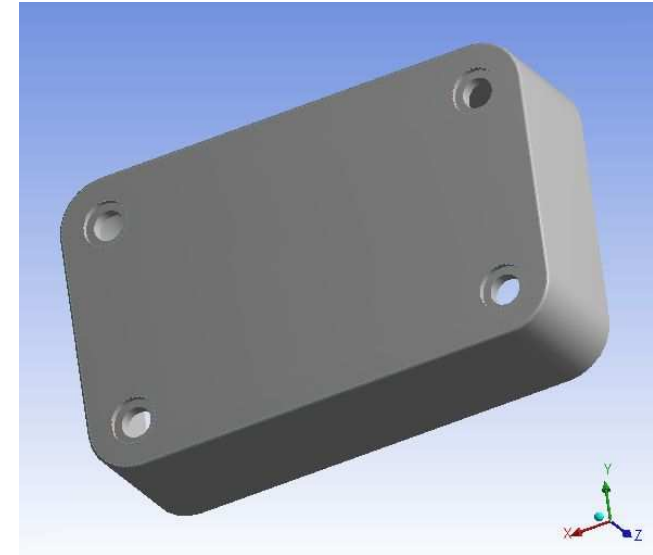


## Workshop 2.1 - Assumptions

- We will represent the constraints on the counter bores, bottom contact area and inner sides using frictionless supports.
  - Frictionless supports place a normal constraint on an entire surface. Translational displacement is allowed in all directions except into and out of the supported plane. Since we would expect frictional forces to act at contact areas this is a conservative approach.

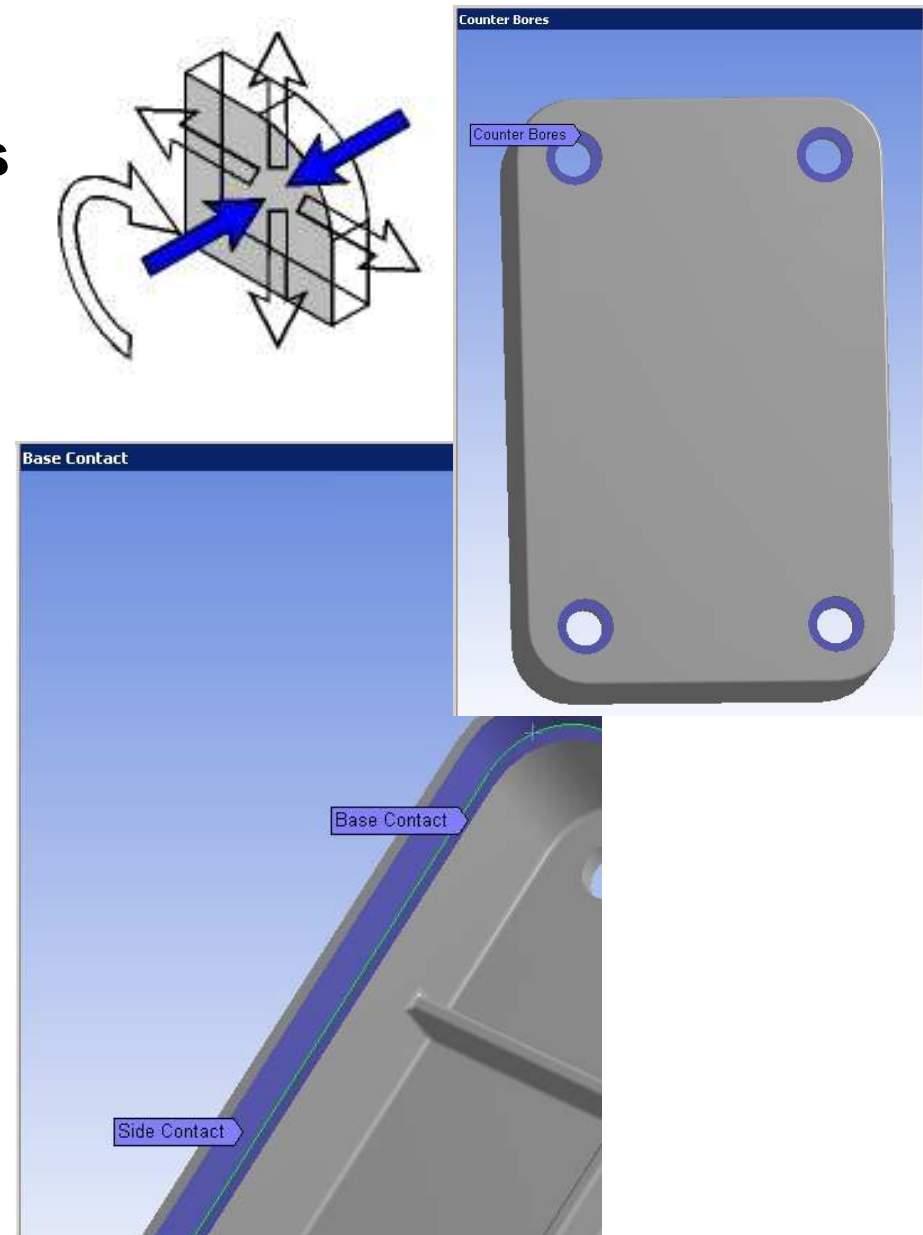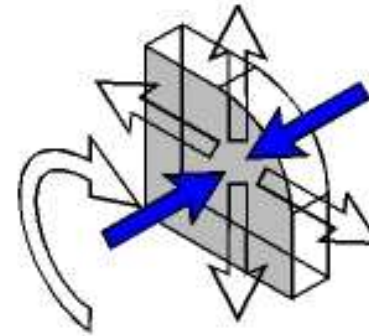


## Workshop 2.1 - Environment

- **Loads:** the load consists of a 1 MPa pressure applied to the 17 exterior surfaces of the cover.

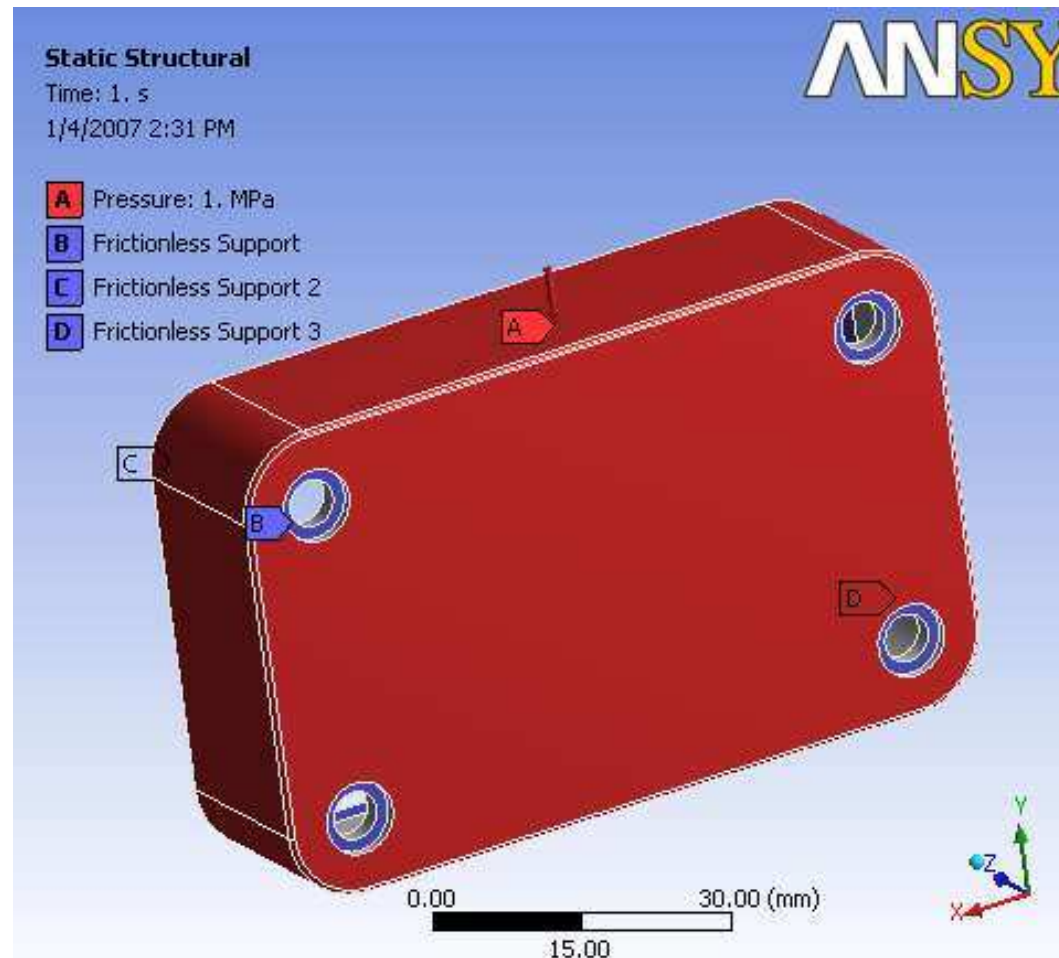

## Workshop 2.1 – Project Schematic


- Open the Project page.
- From the “Units” menu verify:
  - Project units are set to “US Customary (lbm, in, s, F, A, lbf, V).”
  - “Display Values in Project Units” is checked (on).

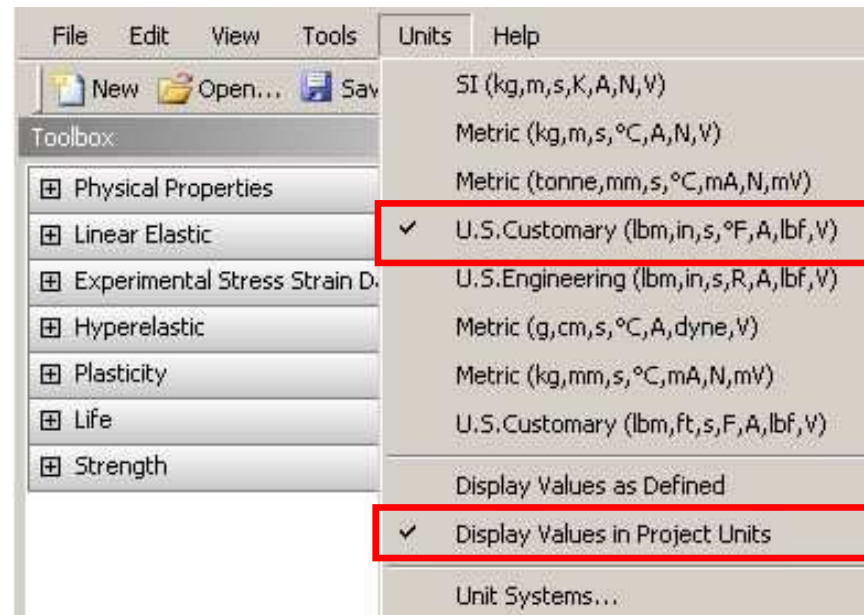




# ... Workshop 2.1 – Project Schematic

1. From the Toolbox choose create a Static Structural system (drag/drop or RMB).

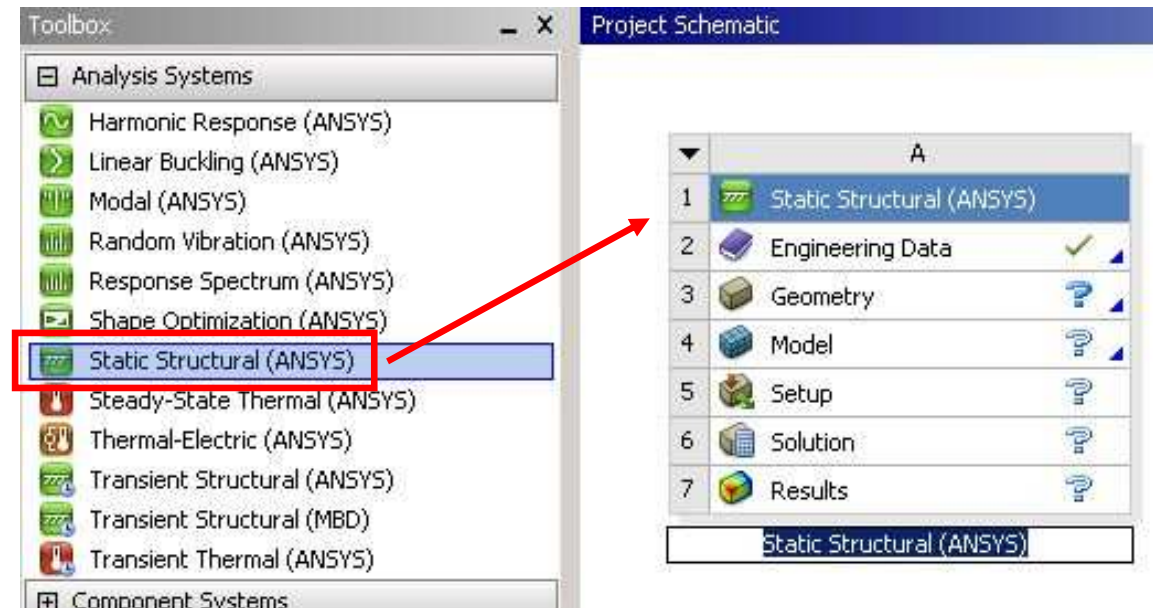


2. RMB in the Geometry cell and Import Geometry. Browse to the file “Cap\_fillet.x\_t”.


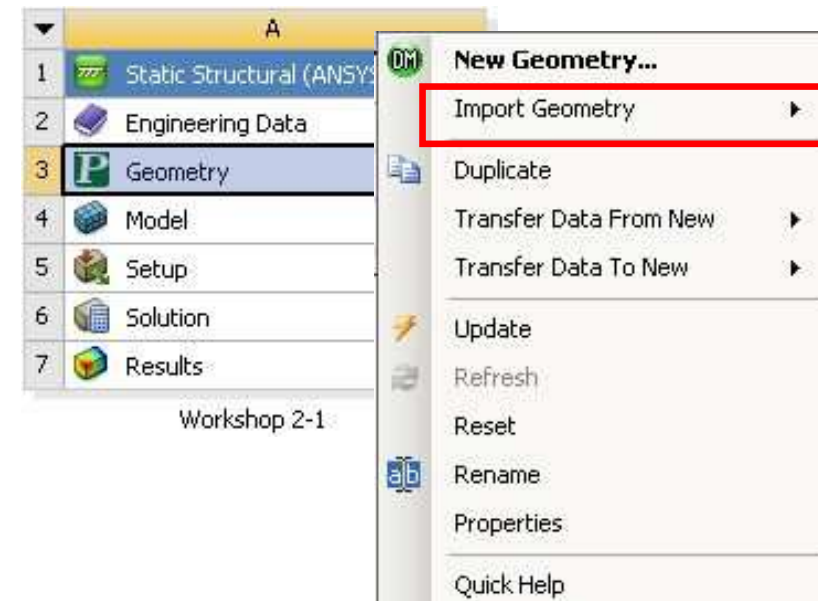


# Workshop 2.1 - Preprocessing

3. Double click the “Model” cell to open the Mechanical application.
4. When the Mechanical application opens the model will display in the graphics window and the Mechanical Application Wizard displays on the right.

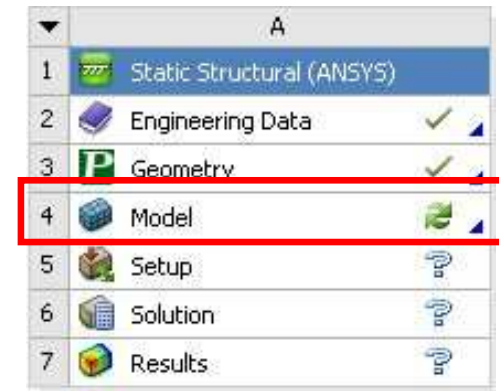

Workshop 2-1

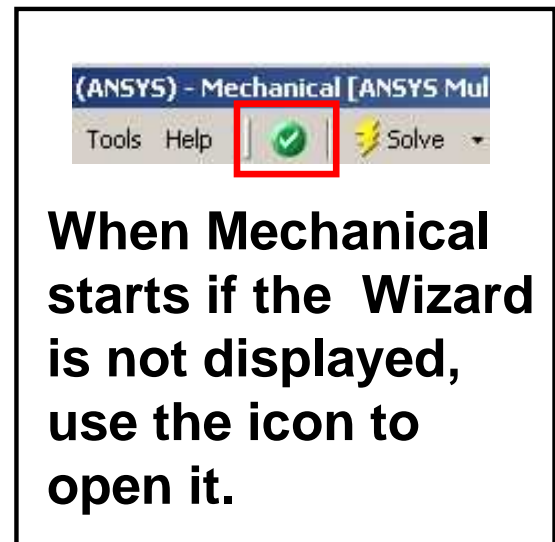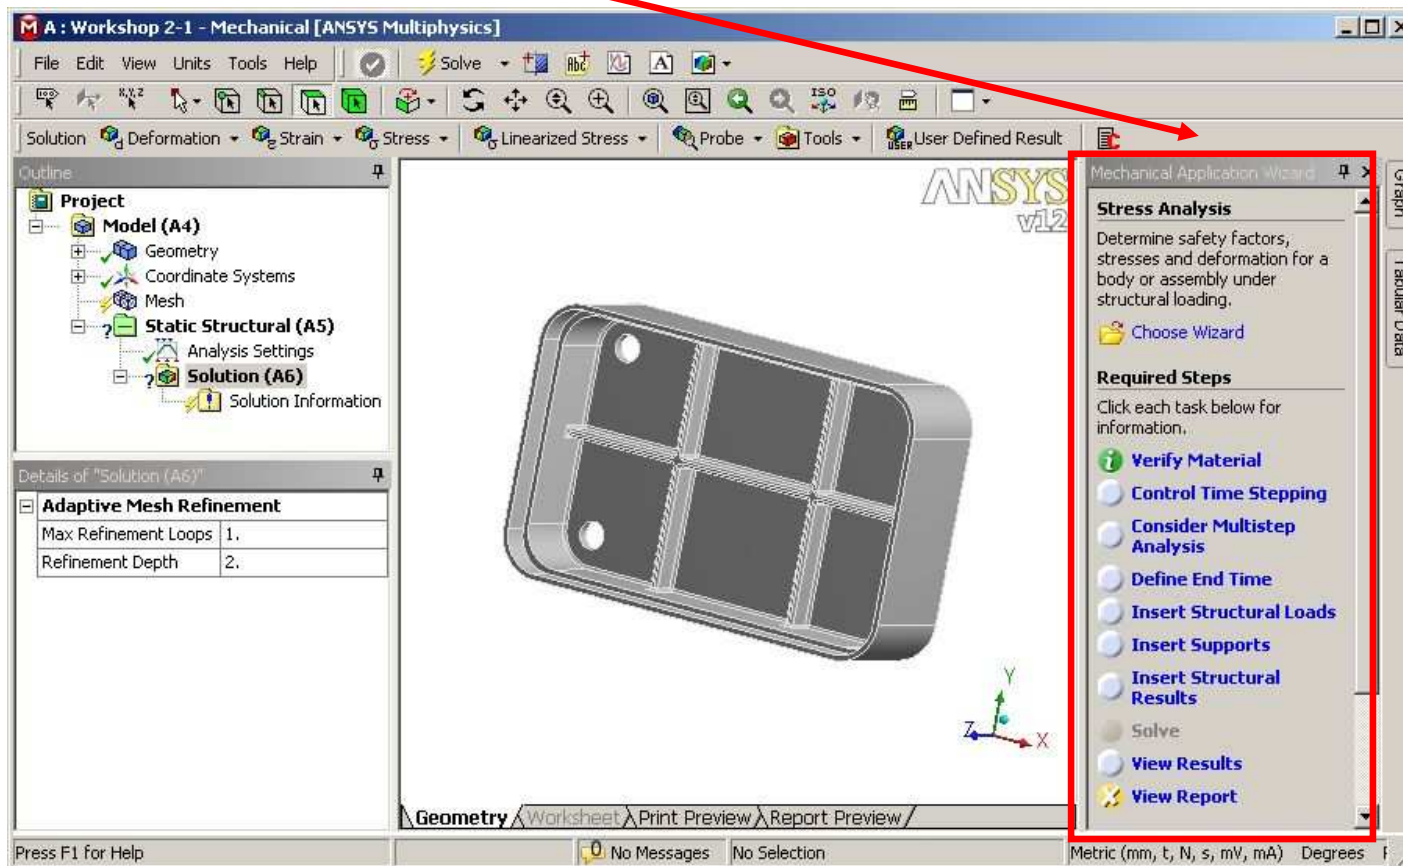




# Workshop 2.1 - Preprocessing

## 5. Set the units system:


- From the main menu go to “Units > Metric (mm, kg, N, s, mV, mA).”

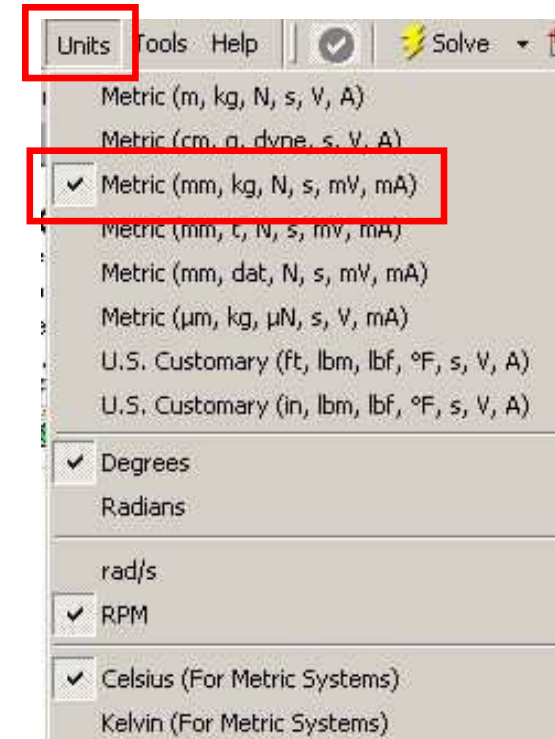


# ... Workshop 2.1 - Preprocessing

## 6. Select a suitable material for the part:

- From the Mechanical Wizard choose “Verify Material”
- Notice the callout box indicates Engineering Data is accessible from the WB2 interface (Project Schematic).

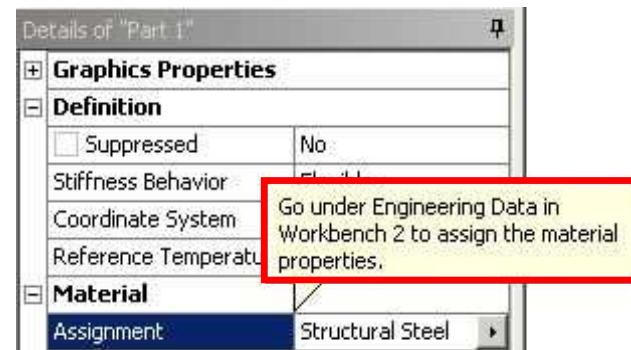

- Return to the Project schematic window and double click “Engineering Data” to access the material properties.

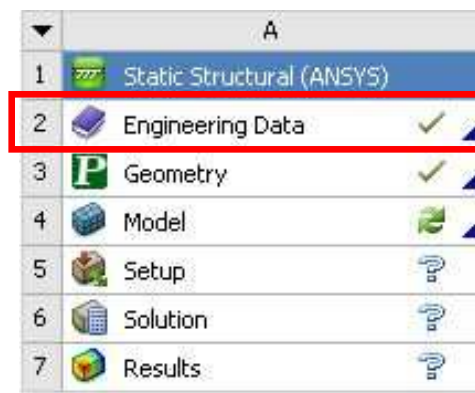

Workshop 2-1






# ... Workshop 2.1 - Preprocessing

**7. With General Materials highlighted click the ‘+’ next to “Aluminum Alloy” to add this material to the current project.**


**8. Return to the Project.**

- Notice the Model cell indicates a refresh is necessary.

**9. Refresh the Model cell (RMB), then return to the Mechanical window.**

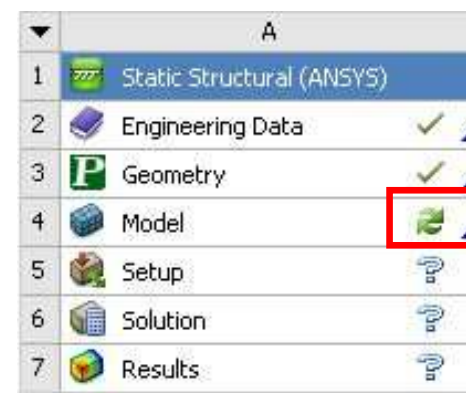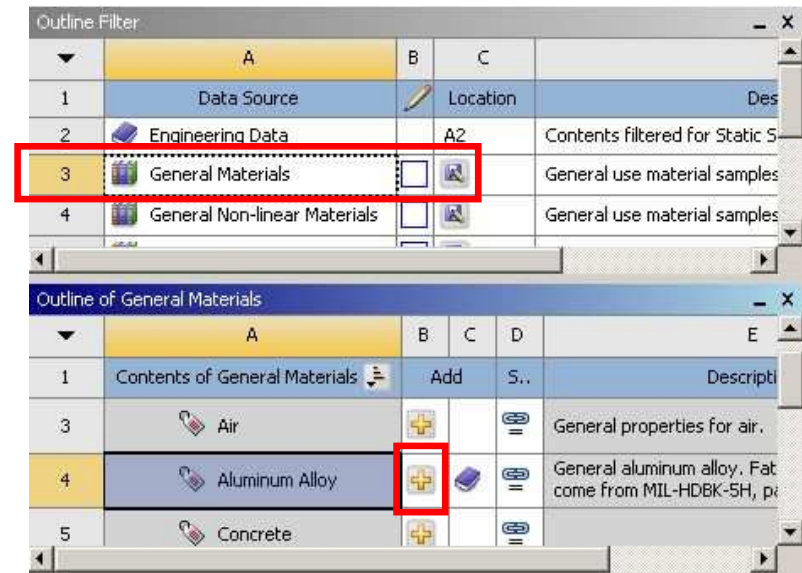


Workshop 2-1

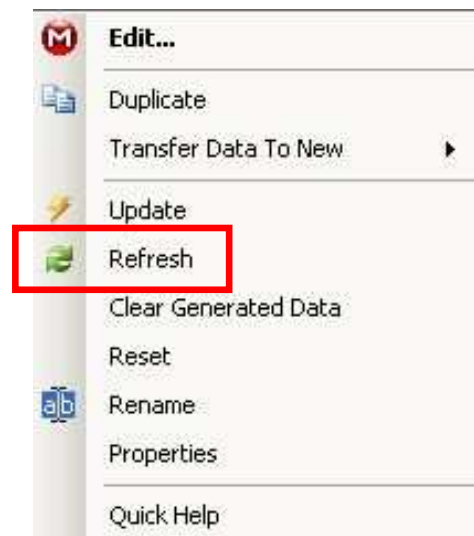

## ... Workshop 2.1 - Preprocessing



- 10. Highlight “Part 1” and click the “Material > Assignment” field to change the material property to aluminum alloy.**

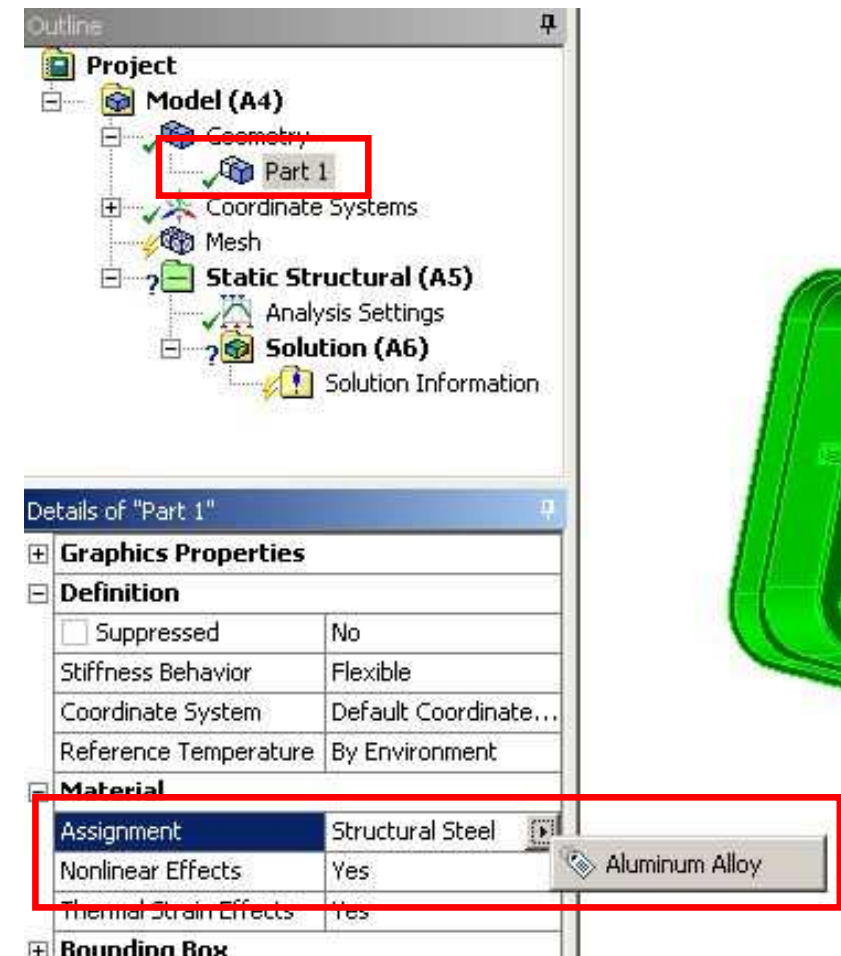

## ... Workshop 2.1 - Preprocessing

## 11. Insert Loads:

- Select “Insert Structural Loads” from the Wizard
- Follow the call out box to insert a “Pressure” load
- The tree will now include a Pressure load in the “Static Structural” environment branch

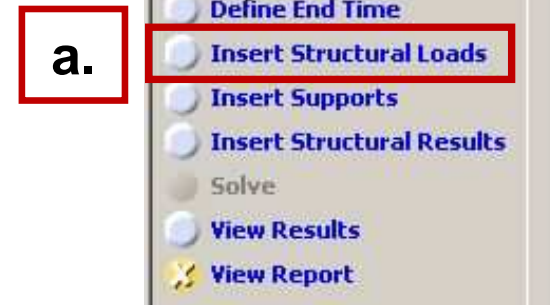
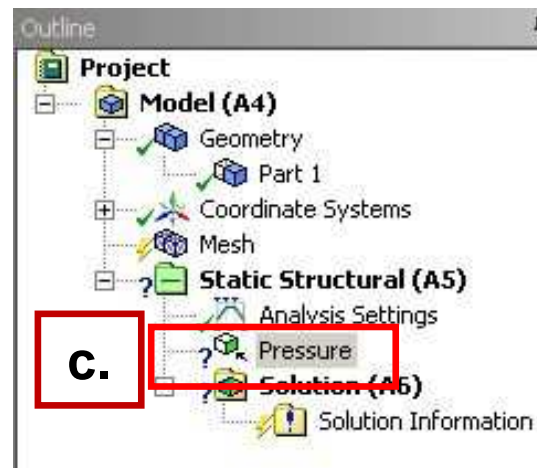




## ... Workshop 2.1 - Preprocessing

**12. Apply the load to geometry:**


- Highlight one of the outer faces of the part.
- Use the “Extend to Limits” icon to select the remaining 16 faces (total 17 faces selected).
- Click “Apply” to accept the faces.
- Enter a “Magnitude” of 1MPa.

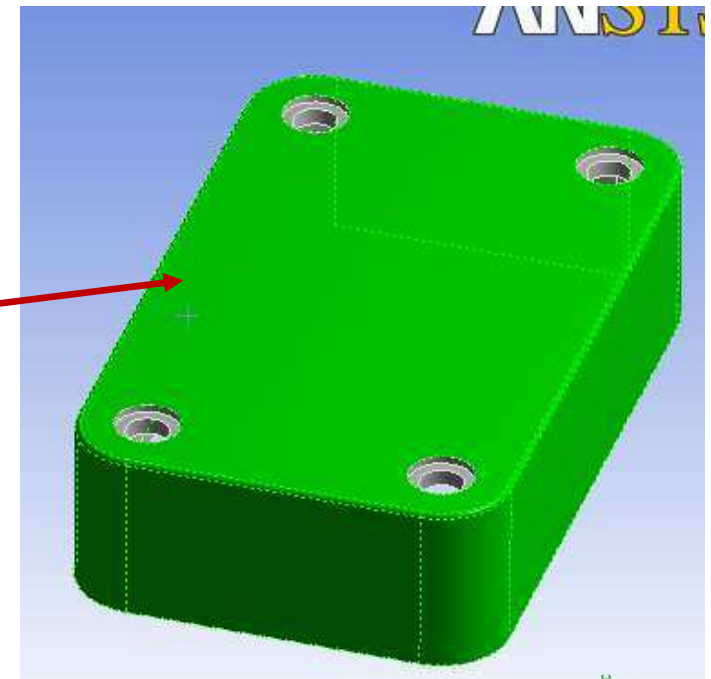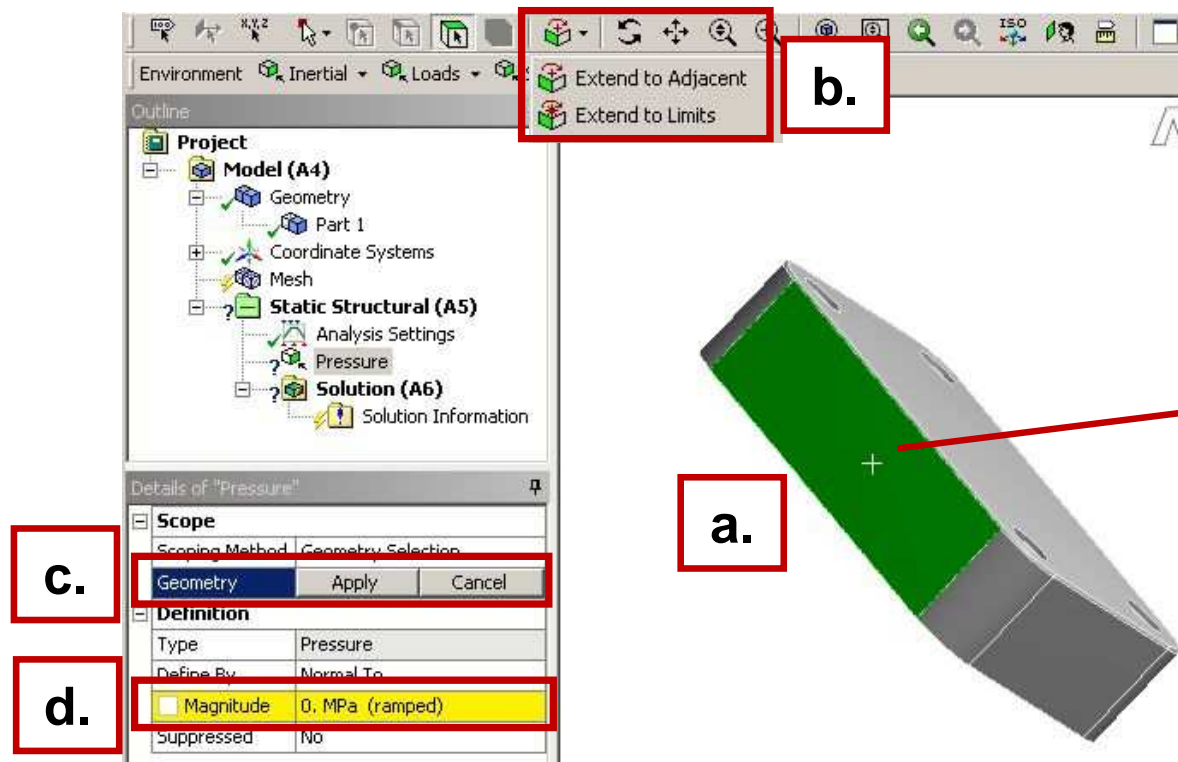


## ... Workshop 2.1 - Preprocessing

**13. Apply supports to constrain the part:**


- Select “Insert Supports” from the Wizard.
- Follow the callout box to insert a “Frictionless Support”.
- “Apply” it to the 4 counter bore surfaces of the part.

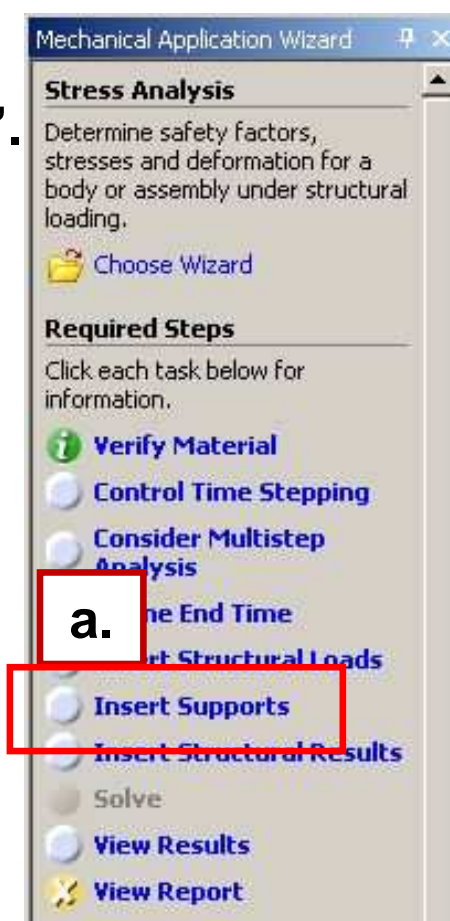


The screenshot shows the Mechanical Application Wizard with the 'Stress Analysis' tab selected. The 'Required Steps' list includes 'Verify Material', 'Control Time Stepping', 'Consider Multistep Analysis', 'Define End Time', 'Part Structural Loads', 'Insert Supports', 'Insert Structural Results', 'Solve', 'View Results', and 'View Report'. The 'Insert Supports' step is highlighted with a red box and labeled 'a.'.

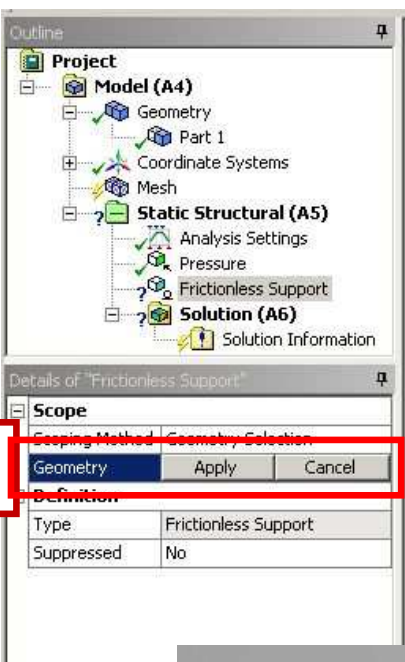


The 'Details of Frictionless Support' dialog box is shown. The 'Scope' section has 'Geometry' selected under 'Geometry Selection'. The 'Definition' section shows 'Type' as 'Frictionless Support' and 'Suppressed' as 'No'. The 'Apply' button is highlighted with a red box and labeled 'c.'.

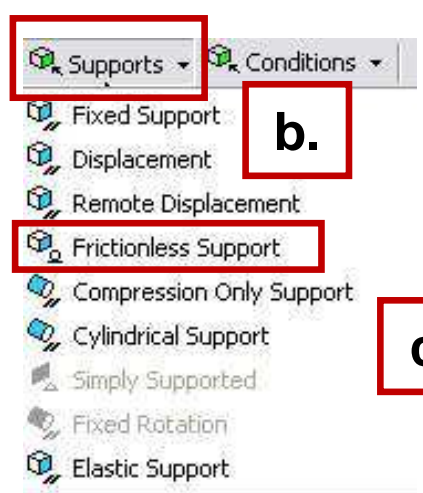

The 'Supports' menu is shown, with 'Frictionless Support' highlighted. A red box labeled 'b.' is around the 'Frictionless Support' option.

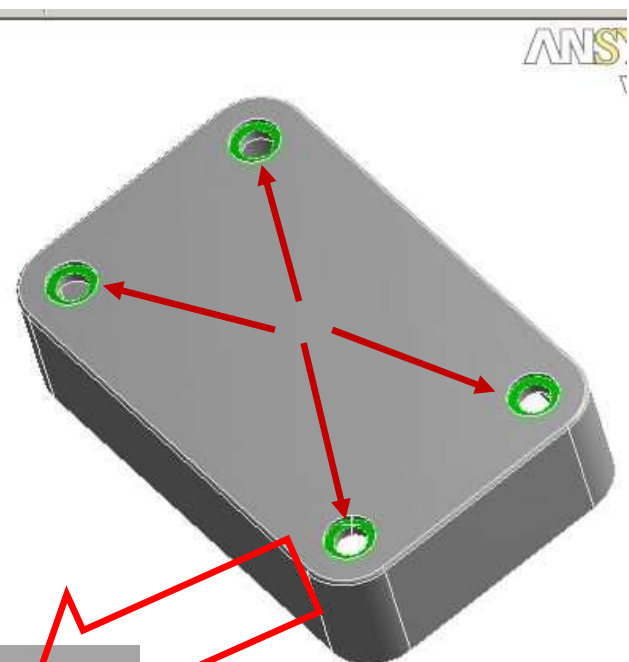


The 3D model of a part is shown with four counter bore surfaces highlighted in green. Red arrows point from these surfaces to the 'Frictionless Support' option in the 'Supports' menu.

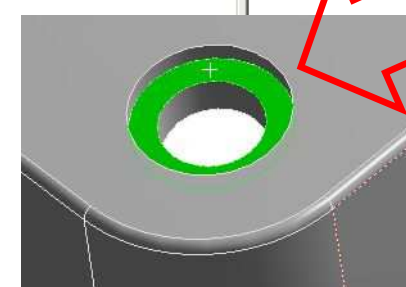


A close-up view of a counter bore surface, showing the green highlight and a red arrow pointing to it from the 3D model.

## ... Workshop 2.1 - Preprocessing

- 14.** Repeat Steps 13.a. and 13.b. to insert a “Frictionless Support” on the inner surfaces of the bottom recess (use extend to limits after selecting one of the inner surfaces).

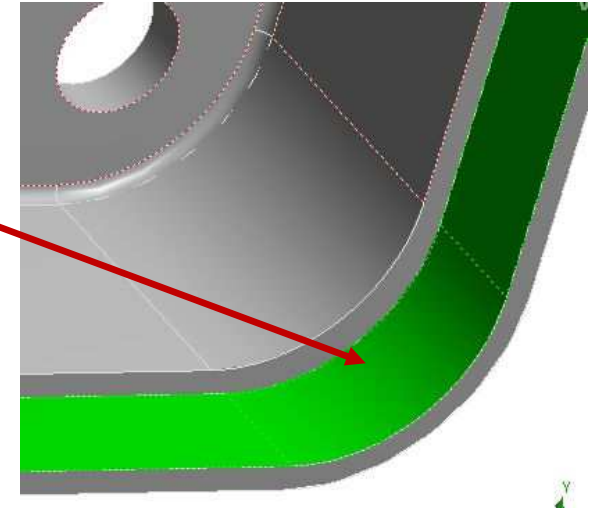




- 15.** Repeat Steps 13.a. and 13.b. to insert a “Frictionless Support” on the lip surface at the bottom of the recess.

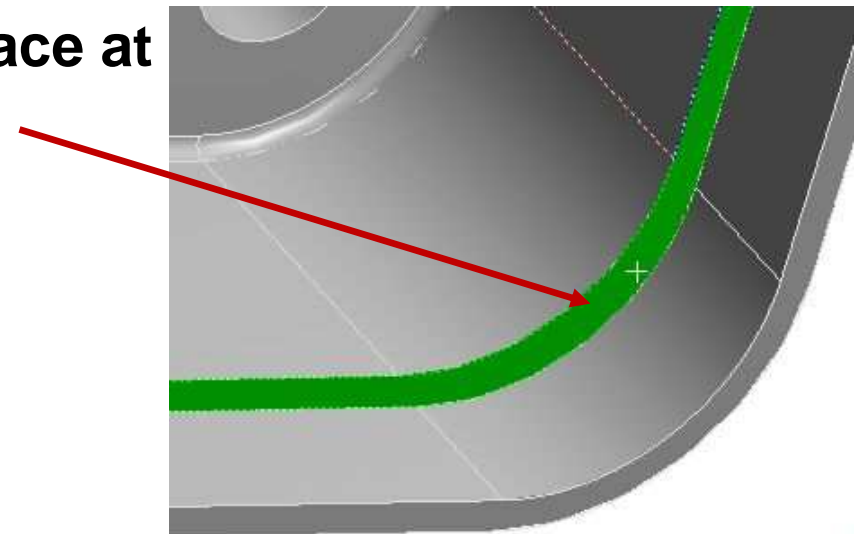

# ... Workshop 2.1 - Preprocessing

## 16. From the Mechanical Wizard request:

- Insert Structural Results (the call out will point to the Solution toolbar).
- Deformation > Total.
- Stress > Equivalent (von-Mises).
- Tools > Stress Tool.

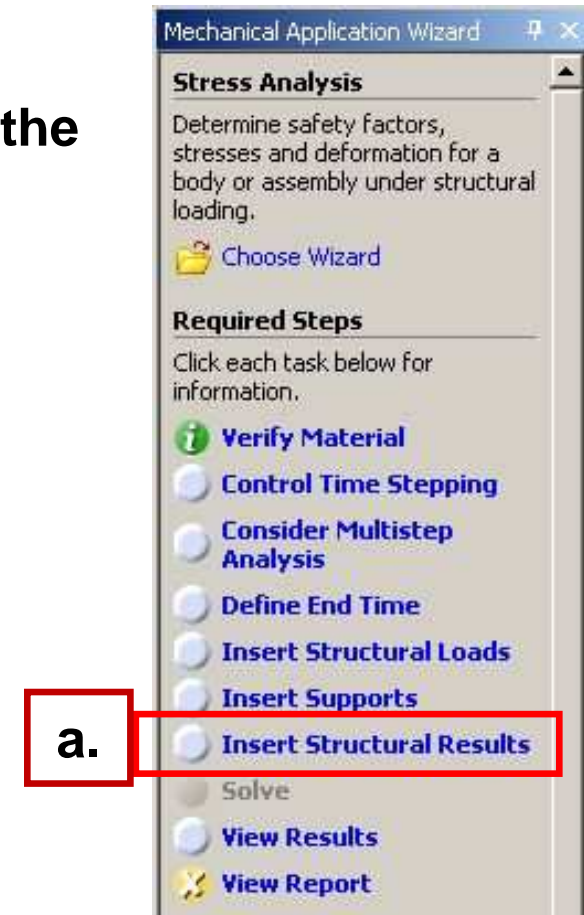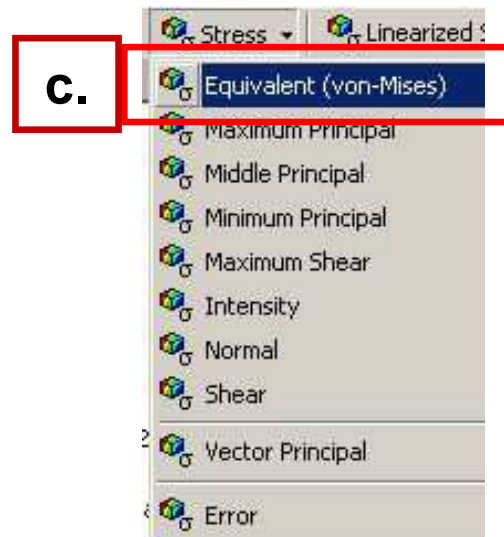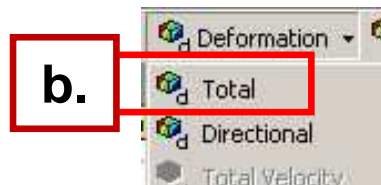

Note the Stress Tool detail allows 4 different configurations (explained later). For this workshop we will leave the tool specified as “Max Equivalent Stress” theory.



Details of "Stress Tool"	
<b>Definition</b>	
Theory	Max Equivalent Stress
Stress Limit Type	Tensile Yield Per Material



# Workshop 2.1 - Solution

## 17. Solve the model:

- Select “Solve” from the Wizard.
- Follow the callout box and click on “Solve”.

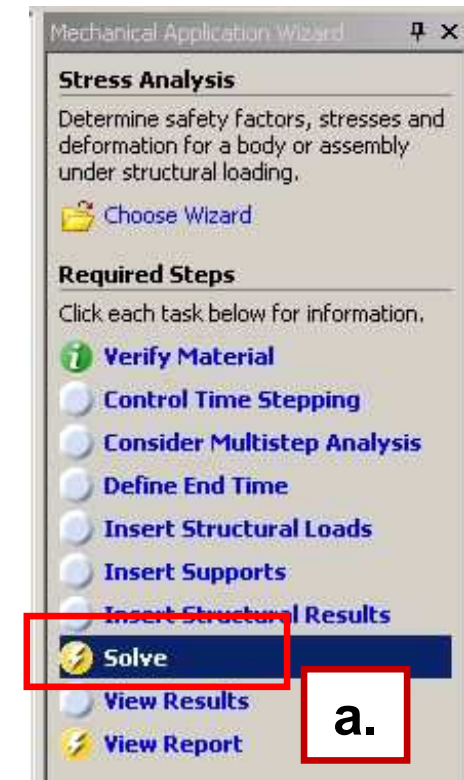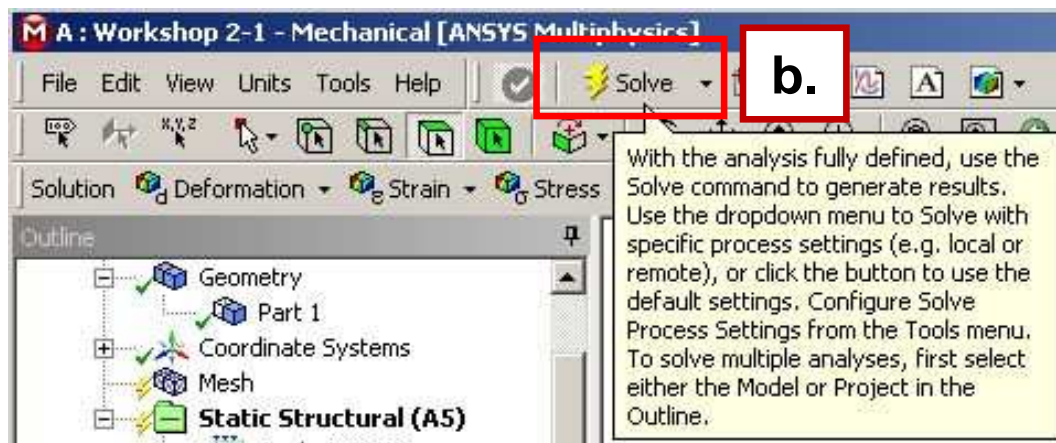


- Note how clicking on “Solve” in the Wizard does not automatically start solving the model but instead, points out the “Solve” icon to the user. Alternatively, you could right click on any branch in the “outline” and choose “Solve”



# Workshop 2.1 - Results


## 18. View the results:

- Click “View Results” from the Wizard
- Follow the callout box to where the results are available under the “Solution” branch

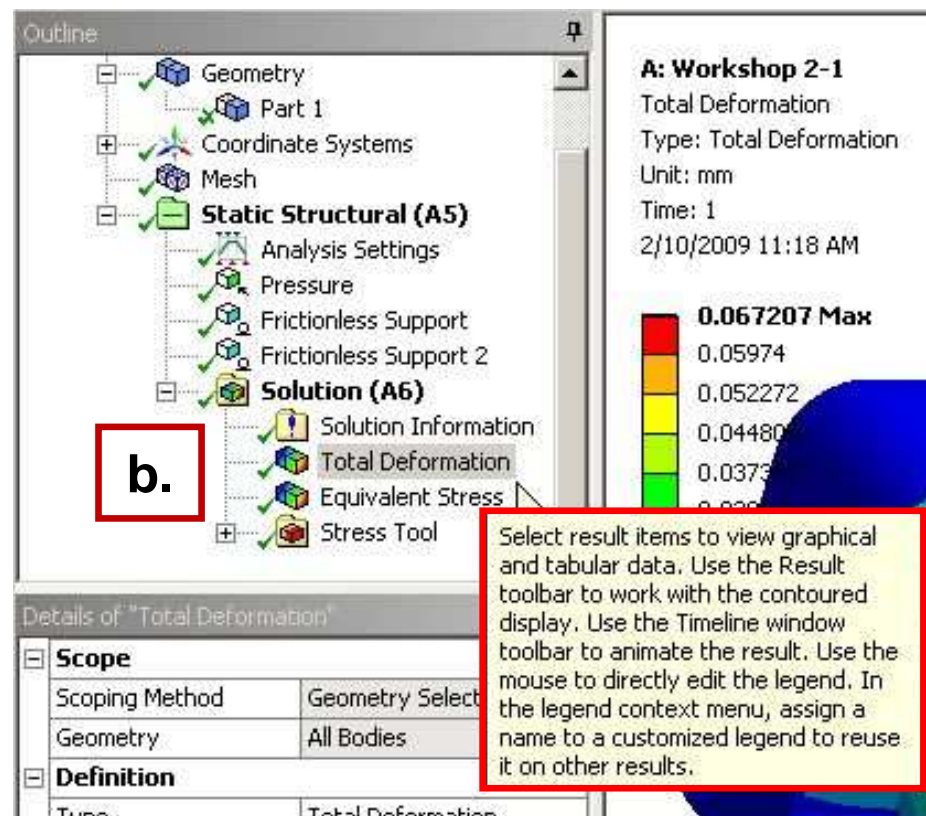

## ... Workshop 2.1 - Results

- Plotting a model's deformation often provides a “reality check” in structural analysis. Verifying the general nature (direction and amount) of deflection can help avoid obvious mistakes in model setup. Animations are often used as well.

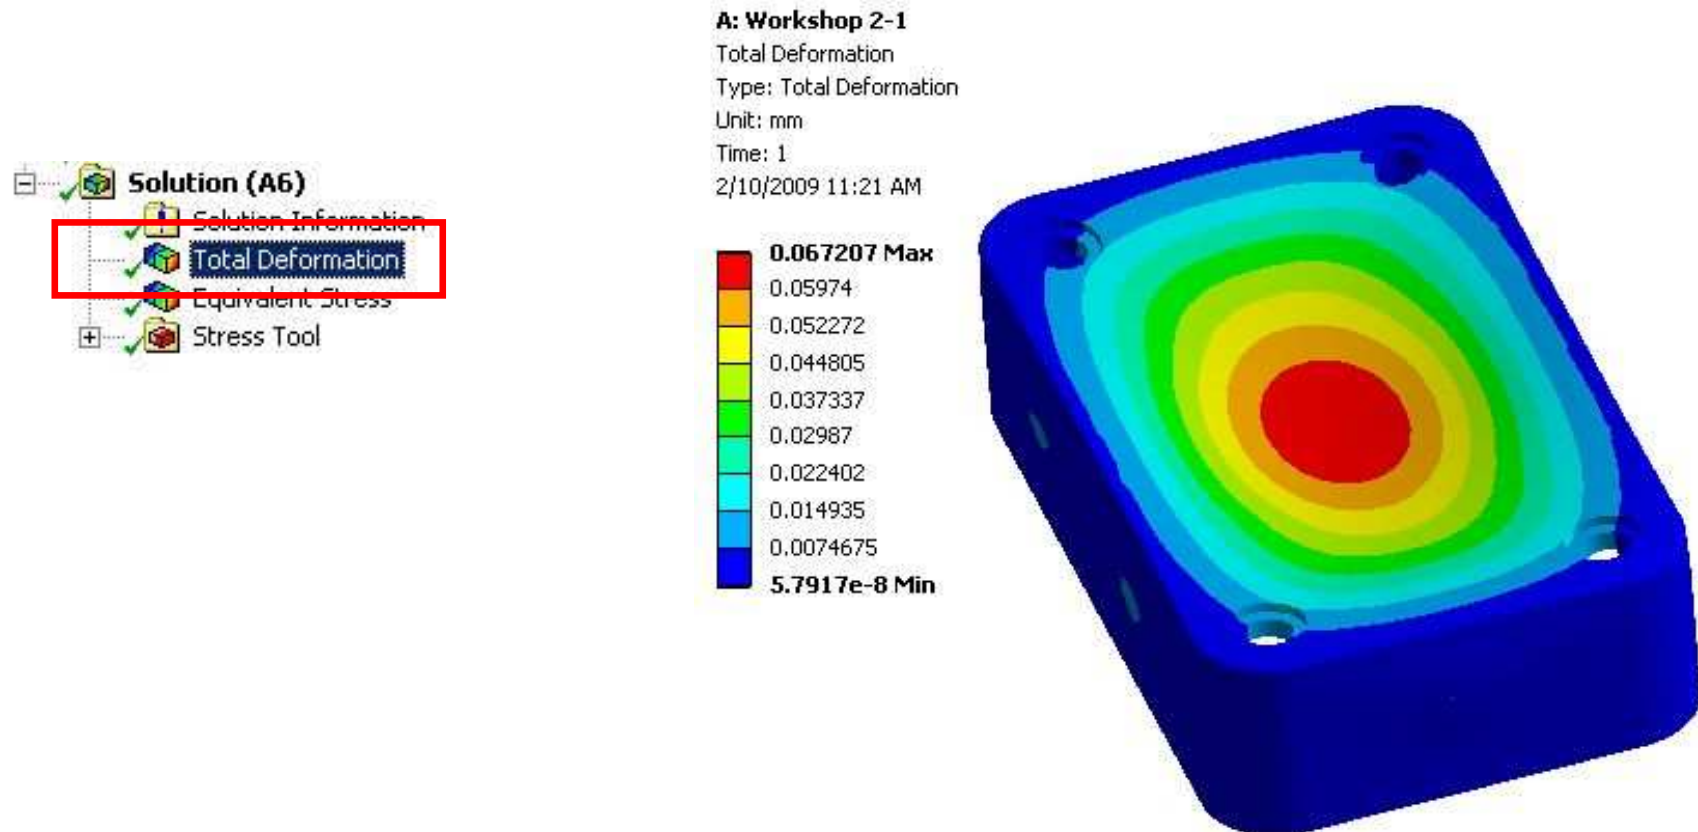


## ... Workshop 2.1 - Results

- After reviewing stress results expand the safety tool and plot safety factor. Notice the failure theory selected predicts a minimum safety factor of just over 1.



**A: Workshop 2-1**  
Safety Factor  
Type: Safety Factor  
Time: 1  
2/10/2009 11:23 AM

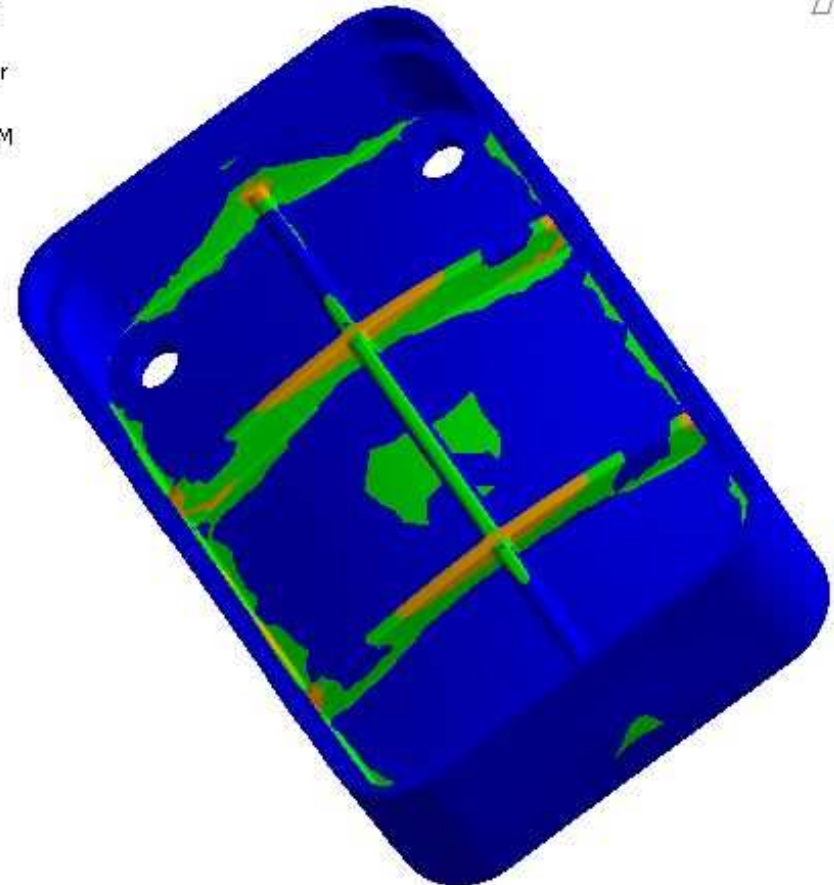

# Workshop 2.1 - Report


## 19. Create an html report:

- First choose the graphical items you wish to include in your report by highlighting the branches and orienting the plot (this is your choice).
- Next, insert a “Figure” from the toolbar.
- Click the “Report Preview” tab to generate the report.


**a.**



**b.**

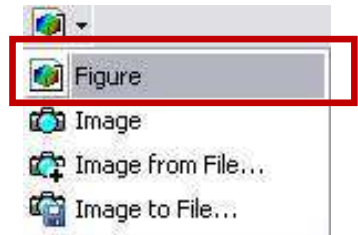

**c.**

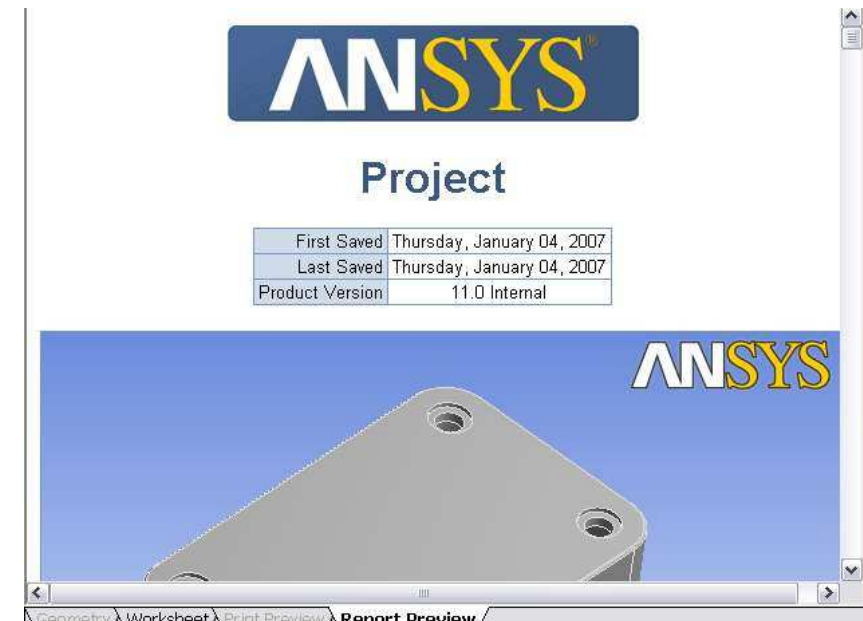

## ... Workshop 2.1 - Report

### Notes on Figures:

- **Figures are not limited to results items. Adding a plot of the environment branch, for example, will include an image of model boundary conditions in the Report.**
- **Figures are independent. You may set up individual figures and have their orientation, zoom level, etc. retained regardless of the active model orientation or other figures.**
- **Individual branches can have multiple figures associated with them.**